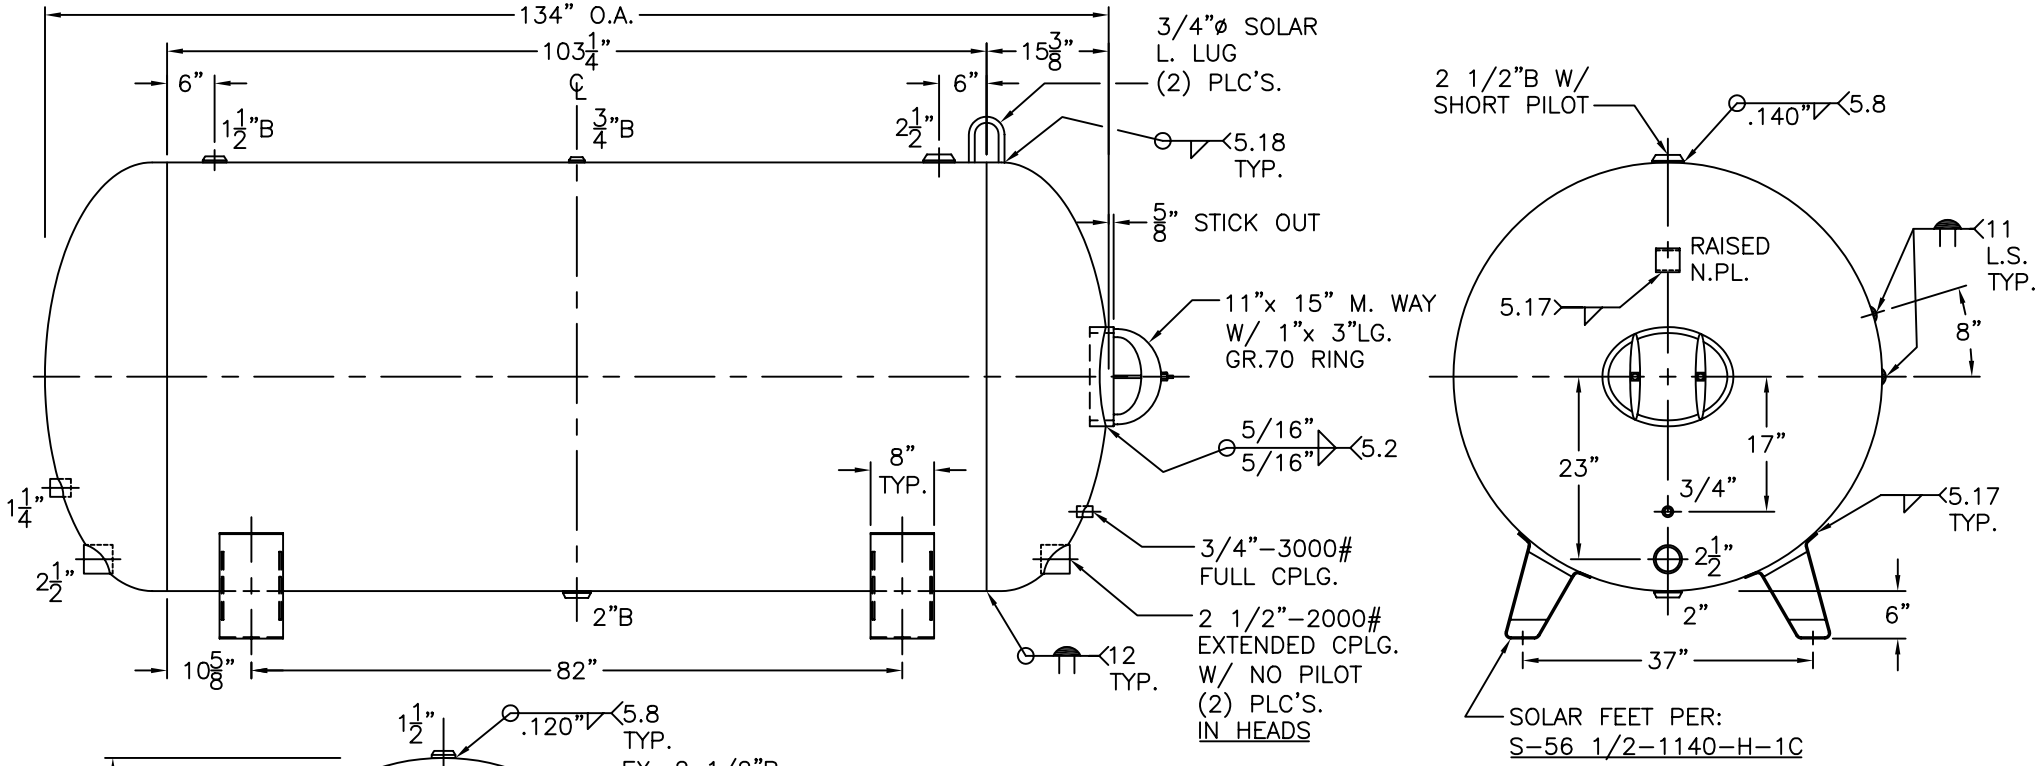

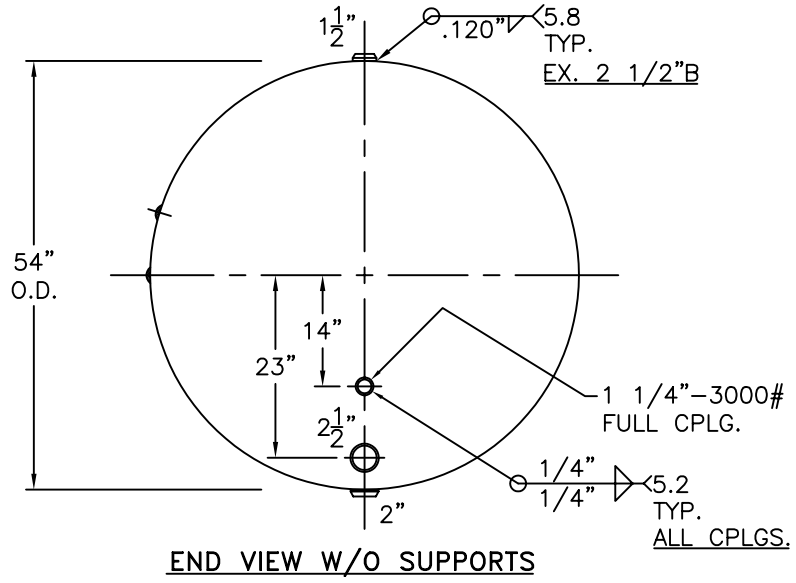

END VIEW W/O SUPPORTS

2) SHELL: 8-4-04 PROOF TEST.
NOTE: 1) HYDRO @ 240 PSIG. MIN.

SHELL / HEADS	.250" SA-455 2:1 S.E.
	(.249" MIN.) JOGGLE
	.225" SA-455
M.A.W.P. 160 PSIG. @ 180 °F	
ASME SECTION VIII 2001 ADD. 2003	
X-RAY: RT-NO/H.L.W.	
GALLONS: 1225	WT. 1924 LBS.
SERIAL NO.	

ES-54-1225-H	REV. 9-20-04
	DATE: 10-4-89
FOR: HANSON STANDARD	
HORIZ. HOT WATER TANK	
SURFACE AREA = 168.3 SQ. FT.	
INSIDE: EPOXY LINED	
OUTSIDE: PRIME	
CAD-"B" UNDER "STD"-SERIES	
BY: E.S.	SCALE: 3/4"=12"

ROY E. HANSON JR. MFG.
1924 COMPTON AVE.
LOS ANGELES, CA 90011